

WorldCard Mac

User Manual

Version: 2.0

Release: December, 2008

Penpower Technology Ltd.

Software User License Agreement

You are licensed to legally use this software program ("the Software") by Penpower Technology Ltd ("Penpower") under this license agreement ("The Agreement"). If you do not agree with any of the provisions in this Agreement, please do not install, copy or use the Software. By using the Software, you are deemed to fully understand and accept the provisions of this Agreement.

1. Intellectual Property

All intellectual property rights in the Software, together with all information and documents included in the packaging for the Software (including but not limited to copy-rights), are property of Penpower, and are protected by relevant laws and regulations.

2. License to Use

You are authorized to use the Software on one (1) single computer only. You may not use the Software on any other machines other than the said single computer.

3. Authority to Copy

The Software and all documents included with the Software, and copyright thereof, are property of Penpower. You are licensed to make one (1) copy of the Software for your personal backup purposes. All other acts of copying are strictly prohibited.

You may not sell, lease, disassemble, reverse engineer, copy, translate, adapt or derive the Software, or obtain the source code of the Software by any other means. You may not use the Software for any purposes other than those permitted under this Agreement.

4. Business Users

If you need to install or use the Software on more than one (1) computer, please contact Penpower or our local distributor to purchase a license for the additional use.

5. Liability

You agree to indemnify Penpower against all losses, costs, debts, settlement payments or other expenses (including but not limited to attorneys fees) arising from your breach of this Agreement, and you agree to compensate Penpower for all of the abovementioned damages.

6. No Warranty

Effectiveness of a packaged software in handling information is closely related to its software and hardware environment. The Software is published following careful development and product testing by Penpower, but Penpower is not able to conduct tests based on all possible combinations of software and hardware environment. Therefore, Penpower is unable to promise nor warrant that there will be absolutely no risk of loss or damage of information, or any other kind of loss, during installation and/or execution of the Software. You must be fully aware of your risks in using the Software.

Penpower will provide you with the Software and support services in respect of the Software to the maximum extent permitted by law. However, Penpower does not warrant that the Software and information included in the package of the Software contain no defects or errors. Penpower is not liable for any indirect, special or incidental loss arising from the Software, including but not limited to loss of profits, damage to business reputation, cessation of work, hardware malfunction or damage, or any other commercial damage or loss arising from commercial use of the Software.

7. Limitation of Liability and Damages

The maximum amount of compensation payable by Penpower, in respect of any damage incurred by you for any reason under this Agreement, is limited to the amount you have already paid to Penpower in respect of the Software.

Under no circumstances will Penpower be held liable for the possibility of loss, notwithstanding Penpower may be aware of the possibility of such loss.

8. Prohibition Against Sublicense

You are prohibited to assign the license in respect of the Software granted to you under this Agreement, or to grant a sublicense to another person.

9. Jurisdiction

With regards to any disputes arising from this Agreement, Penpower and you agree that the court having jurisdiction over the business location of Penpower will be the court in the first instance.

10. Miscellaneous

In the event that any provision of this Agreement is found to be invalid at law, such invalidity will not affect the validity of any other provisions, or the legal enforceability of such other provisions.

In the event that the Software cannot be executed under conditions of normal use, due to any damage to the original disk/s, Penpower will replace the disk/s free of charge.

Contents

Chapter 1 Product Introduction	1-1
1.1 Product Features.....	1 - 1
1.2 Hardware Introduction	1 - 2
1.2.1 Elegant Stylish Design	1 - 2
1.2.2 Specification.....	1 - 2
Chapter 2 Getting Started.....	2-1
2.1 System Requirements.....	2 - 1
2.2 Installation.....	2 - 1
2.3 Starting WorldCard Mac	2 - 2
2.4 Calibration.....	2 - 2
Chapter 3 User Interface.....	3-1
3.1 User Interface.....	3 - 1
3.2 Toolbar	3 - 2
Chapter 4 Scanning Business Cards	4-1
4.1 Scanning a Business Card.....	4 - 1
4.2 Browsing Contacts	4 - 1
4.3 Editing Contacts.....	4 - 2
4.4 Scan Wizard	4 - 2
Chapter 5 Editing Contacts.....	5-1
5.1 Edit Mode.....	5 - 1
5.2 Business Card Image.....	5 - 2
5.3 Editing Business Card Images	5 - 2

Chapter 6 Managing Contacts	6-1
6.1 Categorizing Cards.....	6-1
6.1.1 Adding and Deleting Categories	6-1
6.1.2 Categorizing from Browse Mode.....	6-1
6.2 Searching Contacts.....	6-2
6.2.1 Text Search.....	6-2
6.2.2 Advanced Search.....	6-2
6.3 Adding Cards	6-2
6.4 Settings.....	6-2
6.5 Importing Contacts.....	6-3
6.6 Exporting Contacts.....	6-4
6.7 Sending Emails	6-6
6.8 Visiting Website	6-6
6.9 Online Map	6-6
6-10 Backup Contact Information	6-6
6-11 Restore Contact Information.....	6-6
6-12 Create Empty	6-7

The software application may have a newer version at the time when this product was being manufactured and/or packaged. If the content on your application screen differs from your User Manual, please follow the latest application screen upon installation.

Chapter 1 Product Introduction

The **WorldCard Mac** provides you a total business card management solution by integrating card recognition, management and transmission functions in a single digitizing unit. So you can find your business cards at anytime and anywhere when you need them.

1.1 Product Features

Digitize business cards in seconds

Scan, recognize, and save contact information directly into Address Book or Microsoft Entourage. Turn business cards into accurate digital format in a few seconds.

Support multiple languages

Recognize business cards in 19 different languages: English, Spanish, French, Traditional Chinese, Simplified Chinese, Japanese, Korean, German, Italian, Dutch, Portugal, Swedish, Norwegian, Danish, Finnish, Russian, Polish, Turkish and Hungarian.

Business card management

Complete set of management functions provided for editing of information, assigning multiple categories and also adding of individual information and photos.

Quick and efficient searching

Quickly and efficiently find your contacts with WorldCard Text Search and Advanced Search functions.

Link to map and website

Clicking on the address or website in Card Information fields will link to the map and contact's website directly.

Sending e-mail

Send e-mail by single contact or a category group, either with CC selections.

Data exchange

Export contacts to Address Book, vCard, Microsoft Entourage 2004, Text, HTML, image file format. It also supports importing contacts from Address Book, vCard, WorldCard File.



Elegant stylish design

With intelligent mailbox concept with indication light, the business card scanner guides you to scan business cards in the easiest way that you have never experienced.

1.2 Hardware Introduction

1.2.1 Elegant Stylish Design

The intelligent mailbox concept with indication light, guide you to scan business card in the easiest way that you have never experienced.



Tips

- 1. Business card placement: Insert card with the information side facing up.***
- 2. Intuitive LED indicator: LED indicator will blink when a card is inserted
It will blink faster during scanning.***

1.2.2 Specification

1. Dimensions: 106 x 53 x 27 mm
2. Weight: 160 g
3. Resolution: 600 dpi
4. Interface: USB
5. Image: Color

Chapter 2 Getting Started


2.1 System Requirements

1. Mac OS X
2. Version 10.4 or later
3. Intel based Macintosh

2.2 Installation

Step1 : Insert the software CD.

Step2 : Click **WorldCard Mac**, follow the instructions to install **WorldCard Mac** software.

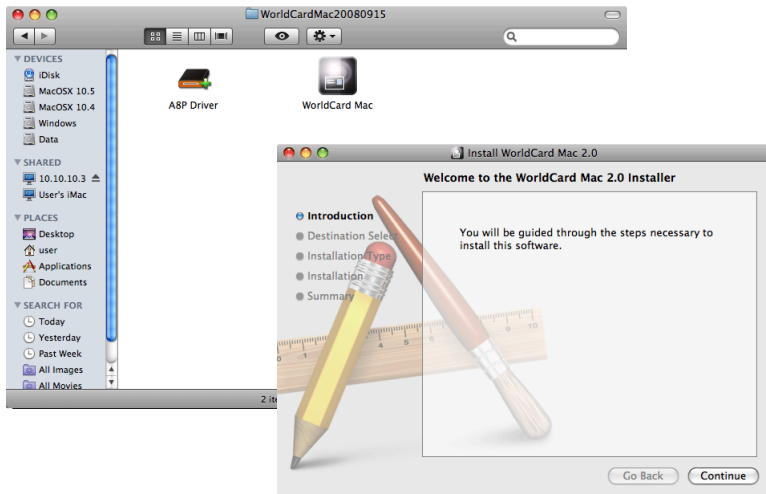


Step3 : Click **A&P Driver**, follow the instructions to install the scanner driver.

Step4 : Connect the scanner to your Mac.




2.3 Starting WorldCard Mac

After installation, you may find **WorldCard Mac** folder under **Applications**. Double click to open the folder. Click **WorldCard Mac** to run **WorldCard Mac**.

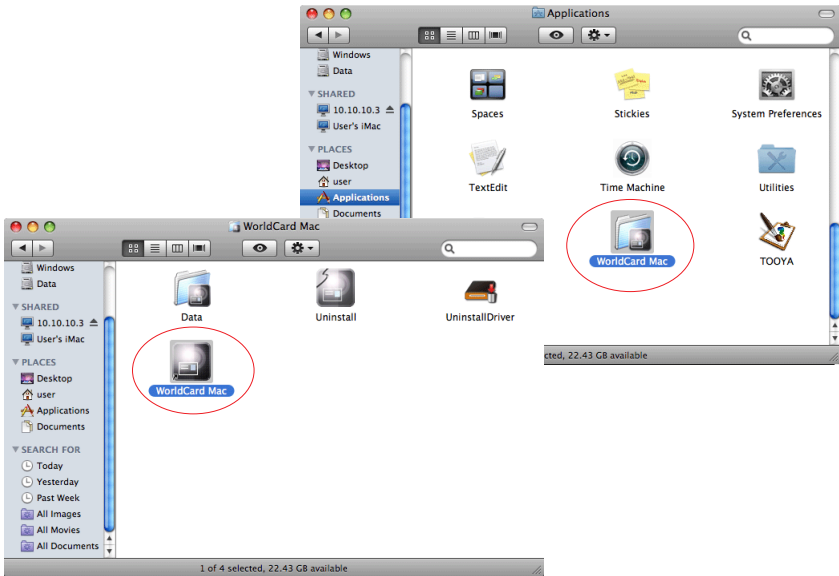

2.4 Calibration


To ensure the perfect results of the colors, when the first time run **WorldCard Mac**, the system will require you to calibrate the scanner. Place the calibration card or the same size blank card into the scanner. Make sure the calibration card is placed face down to the side with the mark. Click **Calibration** to calibrate scanner.

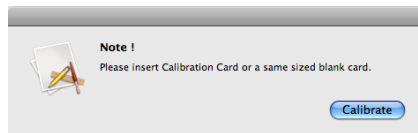

If there is any color indifference after scanning a card, you can calibrate the scanner by clicking Run\Calibration from the menu or the Calibration button on the Scan Wizard.

Chapter 3 User Interface

3.1 User Interface

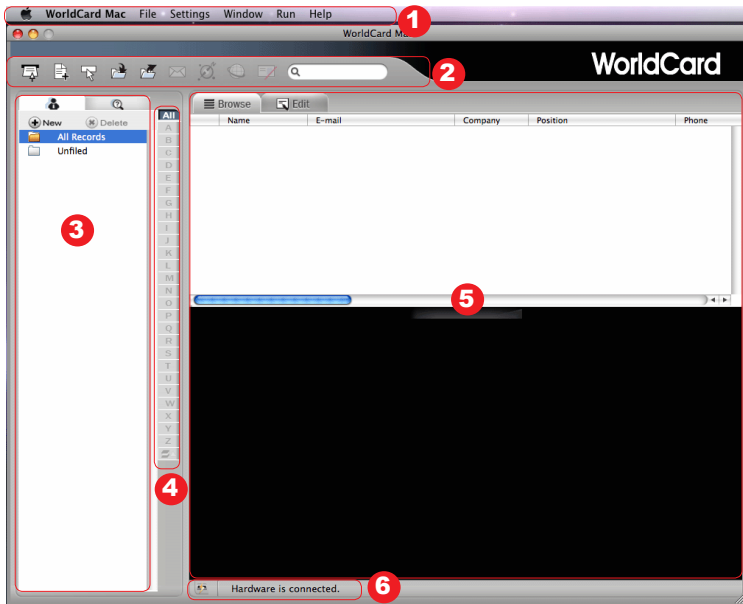

1. Menu: Provide **File**, **Edit**, **Settings**, **Window**, **Run** and **Help** menu.
2. Toolbar: Refer to **Chapter 3.2 Toolbar**.
3. Category/Search tab: **Category**  tab helps you to manage your contacts. **Search**  tab provides advanced search function.
4. Alphabet index: Help you to find your contacts by indexing the first letter of their names.
5. Browse/Edit mode: **Browse**  mode lists the contact information and business card image. **Edit**  mode lets you verify and edit the contact information.
6. Hardware connection status: Show the connection status of the scanner.



3.2 Toolbar



1. Scan  : Scan a new business card.
2. New card  : Create a new contact.
3. Settings  : Scan settings.
4. Import  : Import contacts from other resources.
5. Export  : Export contacts to other application or other formats.
6. Email  : Send an email to selected contact person.
7. Map  : Search the address of the selected contact person from the Internet map service.
8. Web  : Browse the Website of the selected contact person.
9. Delete card  : Delete the selected contact person.
10. Search  : Text search.


Refer to **Chapter 6 Managing Business Cards** for detailed explanation.


Chapter 4 Scanning Business Cards

4.1 Scanning a Business Card

To scan a business card, insert the business card into your scanner with the card information face up. The scanner will begin scanning and recognizing the business card after detecting the business card.

4.2 Browsing Contacts

The scanned business card information is organized into the **Unfiled** category if you did not assign a category. You can also find the scanned business card information in the **All Records**. Click the **Unfiled** category or **All Records** from the left side pane and click the **Browse** mode , the scanned contact information will be listed in the right pane.

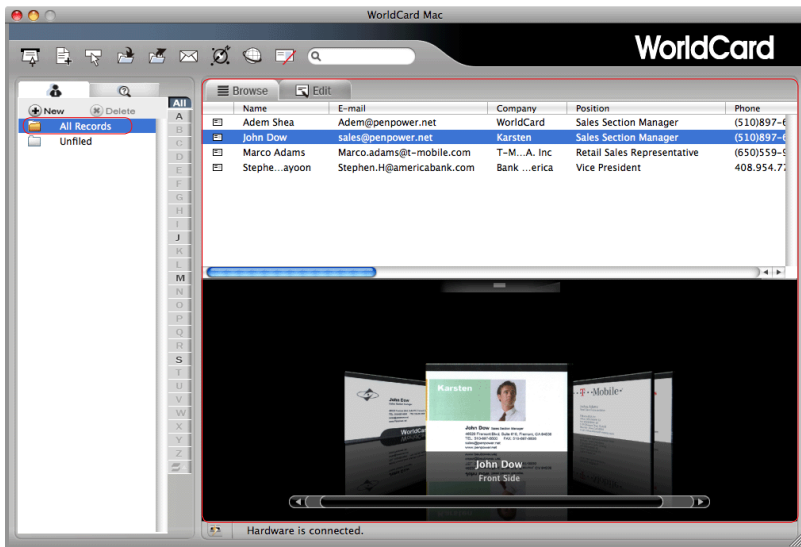


Notice

If you use Mac OS X 10.4, the Browse mode will not display the business card images.



4.3 Editing Contacts


After adding business cards, you may verify the contact information in the **Edit** mode

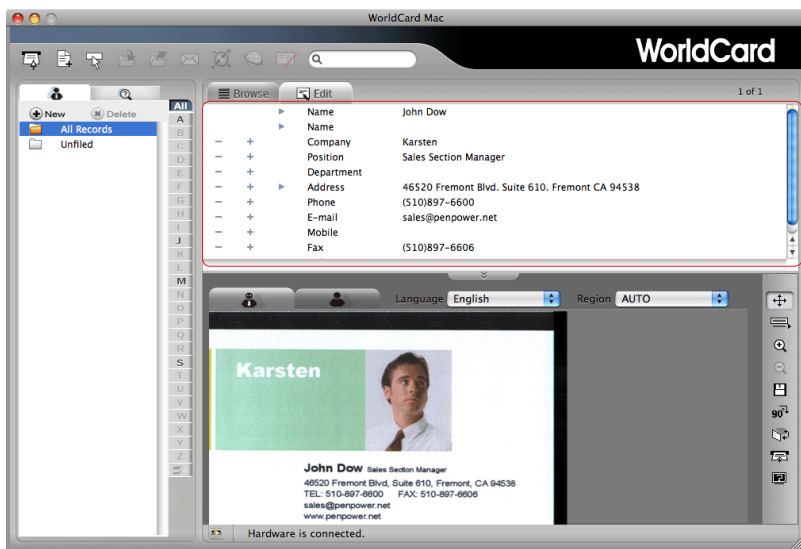

The information is categorized in fields such as **Name, Company, Position, Department, Address, Phone, Mobile, Fax, Email** and **Web Site**...etc. Click the field that you want to correct, and then modify the information manually. Or you can adjust the business card image and recognize again to get the better recognition results. Please refer to **Chapter 5 Editing Contacts** for detailed explanation.

4.4 Scan Wizard

If you have various business cards, you can refer to **Setion 6.4 Settings** to un-check the **Fast Scan** of the **Scan Settings**. Click the **Scan** button  from the toolbar to launch the **Scan Wizard** and follow the steps below to set the parameters and scan business cards.

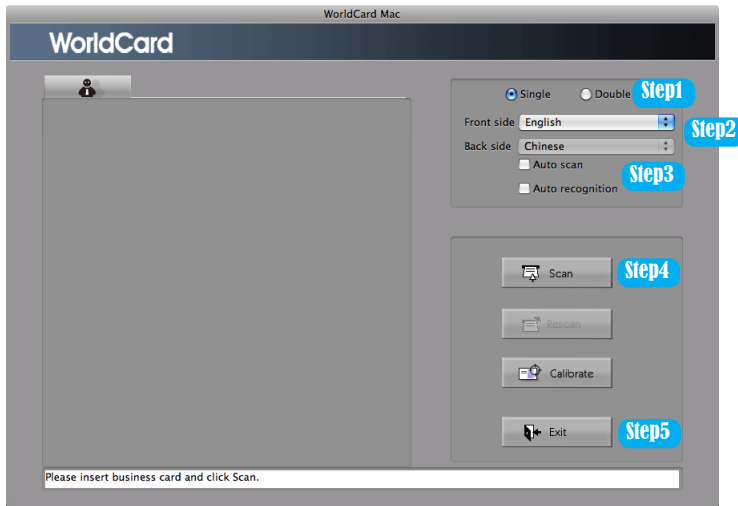

Step1 : Select **Single** or **Double** side business card.

Step2 : Select the language of the business card. If the business card is double-sided select the languages of the both sides.

Step3 : If you want to automatically scan when the business card is inserted, click **Auto Scan**. If you want the business card information to be automatically recognized and added to your file after scanning, click **Auto Recognition**.

Step4 : Insert the business card into your scanner with the card information face up. Click **Scan** button to begin scanning the business card.

Step5 : Click **Exit** to exit the scan wizard and see the recognition results.




When you scan Double-sided business card and want to preview the scanned image before recognition, do not select Auto Recognition.

Tips



Chapter 5 Editing Contacts


5.1 Edit Mode


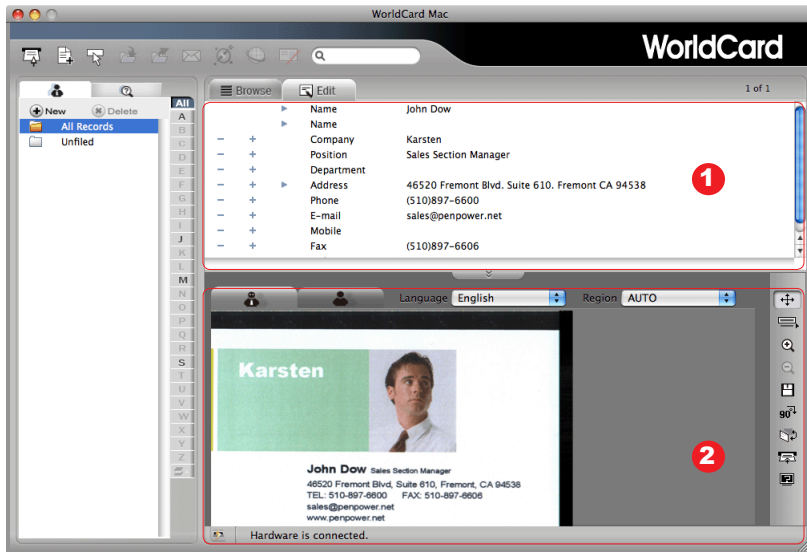


1. Contact information editing area: Provide the information of **Name, Company, Position, Department, Address, Phone, Mobile, Fax, Email and Web Site**...etc. You may edit and verify the contact information in this area. Click **+** to add a field. Click **-** to delete field.
2. Business card image editing area: Provide **View mode, Partial recognize, Zoom in, Zoom out, Save picture, Rotate, Exchange card, Rescan** and **Recognize again** functions for editing the business card image.




5.2 Business Card Image

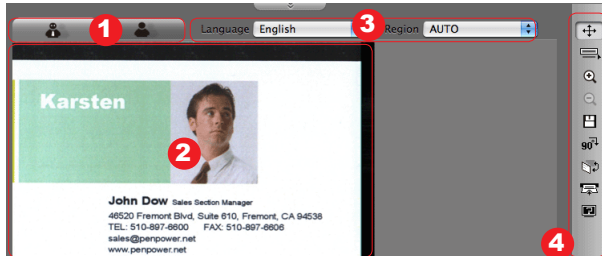

1. Front side or back side image: Click **Front side**  or **Back side**  icon to see the different side of scanned business card image.
2. Business card image: Display the scanned business card image.
3. Recognition language and region: Show the recognition language  and region .
4. Toolbar: Provide **View mode**, **Partial recognize**, **Zoom in**, **Zoom out**, **Save picture**, **Rotate**, **Exchange card**, **Rescan** and **Recognize again** functions for editing business card images.

5.3 Editing Business Card Images

1. View mode  : View the business card image.
2. Partial recognize  : Partially recognize the selected information. You may select a specific area that contains the correct data, and then select the appropriate field. The information will be recognized to the assigned field directly.

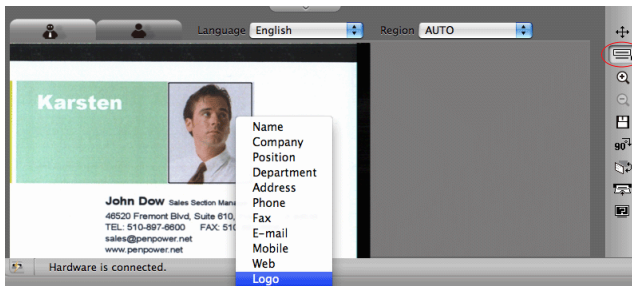



You can click View mode  to view business card image.

Tip

3. Zoom In  : Zoom in the business card image.
4. Zoom Out  : Zoom out the business card image.
5. Save picture  : Save the business card image to .bmp file.
6. Rotate  : If the business card image shows in an incorrect orientation, you can use the **Rotate** function to properly align the business card orientation. Once you click the **Rotate**  button, the business card image will then rotate to 90°.



7. Exchange card  : Exchange the front side and back side business card image.
8. Rescan  : If the scanned image quality is not good and it influences the recognition result, you can use the Rescan function by clicking on the **Rescan**  button to scan the business card again.
9. Recognize again  : After a card image has been edited, it may be necessary to recognize the card data again. You may select the appropriate language of the business card and select the correct region for the language. Then proceed with the Recognize again function by clicking on the **Recognize again**  button.



Attention

The existing information will be cleaned when using Recognize again function.




Chapter 6 Managing Contacts

The management functions allow you to categorize contacts, search contacts, add new cards, import contacts from other sources, export contacts to other applications, search contacts by various data fields or full text, send e-mail by contacts or group functions, visit web site of contacts and search the address from the internet map...etc.

6.1 Categorizing Cards

WorldCard Mac allows you to manage your business cards by storing them in the category groups. After installing the **WorldCard Mac**, you will find **All Records** and **Unfiled** category on the left side of the **Category** pane.




6.1.1 Adding and Deleting Categories

You can add as many user-specified categories as you choose to manage your business cards. Click **+** **New** to add a category and type a category name. You can also click **-** **Delete** to delete your category.

6.1.2 Categorizing from Browse Mode

From **Browse** mode pane, select the contact you want to categorize, drag it directly into a category on the left side of the **Category** pane.

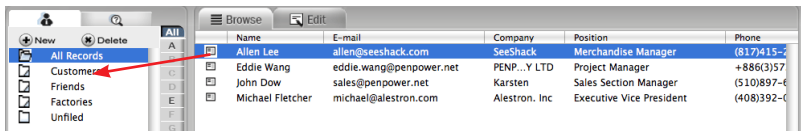

Tip

1. Contacts in each category can be easily moved from one category to another by dragging.
2. Each contact belongs to one category. You can also find it in All Records.
3. To save time, you can also select one category and then scanning business cards into the category.



6.2 Searching Contacts

You can quickly and efficiently find your contacts with **Text Search** and **Advanced Search** features.


6.2.1 Text Search

The **Text Search**  function provides you to quickly find the specific contacts. To use the **Text Search** function, enter a key word in the Text Search box and click the **Search**  button. The search results will display in the **Browse** mode pane.

6.2.2 Advanced Search

WorldCard Mac also offers an **Advanced Search** function for you to search the contacts who match with the specific fields. Click **Advanced Search**  button, the **Advanced Search** pane will appear in the left side pane.

Select the field name that you want to search, and enter a key word in the Search box and click the **Search**  button. The search results will display in the **Browse** mode pane.

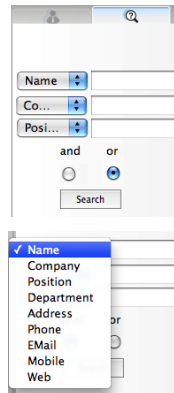


6.3 Adding Cards

WorldCard Mac offers two methods to adding new contacts. You can add a new contacts by scanning business cards as the explanation of **4.1 Scan a Business Card**. You can also click **New Card**  button to create a new contact manually.

6.4 Settings

WorldCard Mac provides Settings for configuring the operational functions of Scan options. Click **Settings**  button or **Settings\Scan option** from the menu to open the **Settings**.

The default configuration as seen in the preceding picture, you may define **Card Style**, **Language** and **Charset**. Click **Enter** for the settings to take effect.

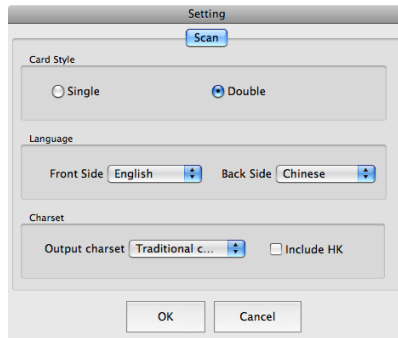



When scanning a Chinese business card, the system will accord with the Output charset to display Chinese character.

Tip

6.5 Importing Contacts

WorldCard Mac allows you to import valuable contact information to **WorldCard Mac** database.


1. Click **Import**  button or **File/Import** function from the menu, the sub-menu below will appear:

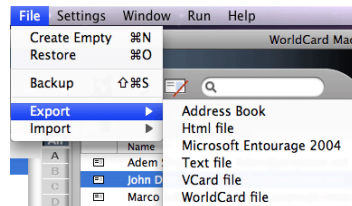


2. Select the import source, the contacts will be imported to **WorldCard Mac**. For example, choose the **Address Book**. A note window will appear to confirm importing all cards. Click **OK** to continue.



3. A note window will appear to show the import results when it is done.

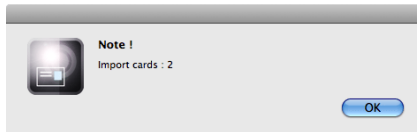


4. The imported contacts will be shown in the **Browse** pane.

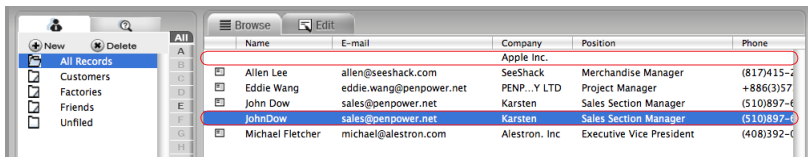

6.6 Exporting Contacts

WorldCard Mac allows you to export the selected contacts or all records to other application or file formats.

1. Select the contacts which you want to export and click **Export**  button or **File\Export** function from the menu, the sub-menu below will appear. Select the export application or file format, for example choose **Address Book**.

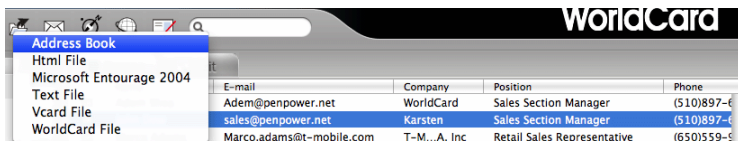


2. Select **All Field cards** or **Selected cards**.



3. A note window will appear to show the export results when it is done.



4. You can find the exported contact information in the **Address Book**.

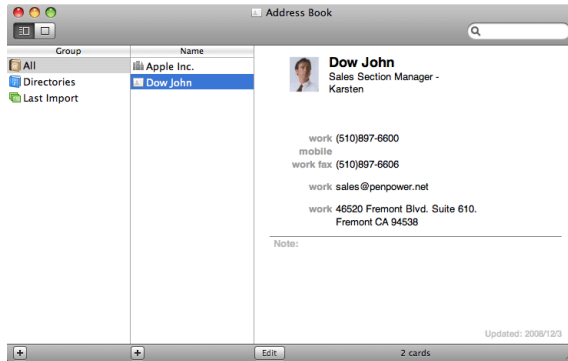

Follow the steps below, you can sync. Address Book with your iPhone or iPod:



Tips

1. Connect iPhone to your computer, and open iTunes (if it doesn't open automatically).
2. In iTunes, select iPhone or iPod in the sidebar.
3. Configure the sync settings in each of the settings panes.
4. Select "Automatically sync when this iPhone is connected" to have iTunes sync iPhone automatically whenever you connect it to your computer.
5. Click Info pane and check contacts.

Please refer to iTunes User Guide for details.



6.7 Sending Emails

To send email to the selected contacts, select the contacts and click the **Email**  button or the **Run>Email** function from the menu. **WordCard Mac** will open the Email editing window of your default Email software, and add the Email addresses into the addressee field.

6.8 Visiting Website

To visit the Website of the selected contact person, select a contact and click the **Web**  button or the **Run\Web** function from the menu. **WordCard Mac** will open your default Internet browser and browse the Website of the contact person.

6.9 Online Map


WorldCard Mac offers you online map with a click of your mouse. Select a contact and click **Map**  button or the **Run\Map** function from the menu. **WordCard Mac** will open your default Internet browser and search the address of the contact person from the Internet map service Website.

6-10 Backup Contact Information

The file **Backup** and **Restore** features make it easier for you to keep your data safe. Click **File\Backup** from the menu, and enter the file name to backup your contact information. The backup file will be saved as .wmf file format.

6-11 Restore Contact Information

You can restore your contact information to the point you backup your contact information by clicking **File\Restore** from the menu. In order to protect your data, **WorldCard Mac** will ask you to backup your contact information.

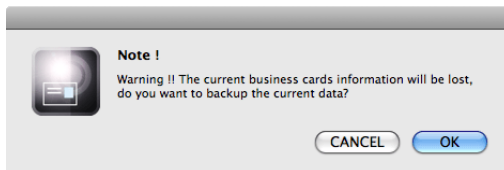

Click **OK** to backup your contact information. Then select a .wmf backup file to restore your contact information.



Attention

- 1. The restore function will clean the current contact information, please use it with care.*
- 2. WorldCard Mac saves the database in the Documents/My Business Card, please do not delete or modify it with other programs.*

6-12 Create Empty

If you wish to create a new database, you may backup your current contact information and click **File\Create Empty** from the menu. All the contact information will be cleaned after executing the **Create Empty** function.



Attention

The Create Empty function will clean the current contact information, please use it carefully.



CE Conformity and FCC Statement



This equipment has been tested and found to comply with the limits of the European Council Directive on the approximation of the member states relating to electromagnetic compatibility according to EN 55022/55024 Part 15 B.



This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient the receiving antenna
- Increase the separation between the equipment and receiver
- Move the computer away from the receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected

WorldCard Mac User Manual

Manufacturer: Penpower Technology Ltd.

Version: 2.0

Release: December, 2008