

Contents

Chapter 1 : Product Features	1-1
Chapter 2 : System Installation	2-1
System Requirements	2-1
Software Installation	2-1
Software Registration for PenPower WorldPhone (WinCE)	2-2
Chapter 3: Function Guide	3-1
Getting Started	3-1
Connecting Mobile Phone	3-1
SMS Functions	3-3
Add new SMS category	3-3
Add New SMS	3-4
Download SMS	3-5
Reply SMS	3-6
Forward SMS	3-6
Modify SMS	3-6
Phone Book Functions	3-7
Download Phone Book	3-7
Modify Phone Book Info	3-7
Add New Info to Phone Book	3-8
Dial	3-8
Add new dynamic fields to Phone Book	3-9
Logo Function	3-10
Download/Upload Logos	3-10
Edit Logos	3-11
Send Out Logo in SMS Format	3-12
Import Image Files	3-12
Ring Functions	3-13
Add New Rings	3-13
Import Midi Files	3-14
Send out rings in SMS format	3-14

Dial Functions	3-15
Import/Export	3-15
Language Options	3-15
Appendix	3-16

The software application may have newer version at the time when this product is being manufactured and/or packaged. If the content on your application screen differs from that of your User's Guide, please follow the latest application screen upon installation.

Chapter 1 : Product Features

Basic Functions

1. Able to import/export all info/data and support copying to memory cards.
2. Able to auto-detect mobile phone models via infrared, and also support BlueTooth transmission.
3. Support CPU type Pocket PC units, such as ARM, MIPS, and SH3.
4. Able to input/view info/data in Traditional Chinese, Simplified Chinese, or English.

SMS Receiving/Sending Function

1. Download mobile phone SMS onto Pocket PC via infrared or BlueTooth (depending on the model of a mobile phone) to perform edit, copy, add, reply or forward functions.
2. Auto break-up a long SMS into a series of shorter SMSs prior to send.
3. Support SMS in Chinese, English and other European languages.
4. Edit your own signature as well as Frequent-SMS.
5. The many SMS management functions allow you to categorize SMS, and to define your own SMS categories.
6. Send SMS by using mobile phone or the WinCE Phone Book. You can send out the same SMS to several people at a time.
7. The transmission numbers of in/out SMSs can automatically be displayed/shown as "names" per phone book info for handy reference.

Logo Transmission Function

1. Personalize your screen tag, screen saver, start-up screen, and SMS logo.
2. Provide logo preview function and various drawing tools.
3. Import computer graphic files for use as mobile phone logos.
4. Support the editing of colour logos.
5. Support logo transmission in SMS format.

Phone Book Function

1. Download phone book info onto computer to perform edit, add, sort or search functions.



2. Support phone books in Chinese, English and other European languages (depending on the model of a mobile phone).
3. Provide the options to save phone book info onto your mobile phone or SIM card, as well as to group phone numbers.
4. Many contact list functions: support all sorts of mobile phone contact list fields, such as occupation, address or e-mail, etc.
5. Dial straight from Phone Book.

Personalized Rings Function

1. Personalize mobile phone rings, and upload onto mobile phone.
2. Choose either "mobile phone simple keyboard" or "staff" to input ringing tune.
3. Provide the trial-ring function.
4. Import Midi file and convert it to mobile phone ring format.
5. Support ring transmission in SMS format.

Dial Function

1. Input phone numbers directly from the Pocket PC, instead of using the mobile phone keypad to dial out.
2. Support international direct dialing.


Chapter 2 : System Installation

System Requirements


1. OS: Pocket PC (WinCE 3.0) or higher
2. RAM: 1MB

Software Installation


1. Make sure your PC and your Pocket PC are in online mode, and insert your PenPower WorldPhone CD into your PC. The system will automatically run the installation program. Please select your language version for installation.

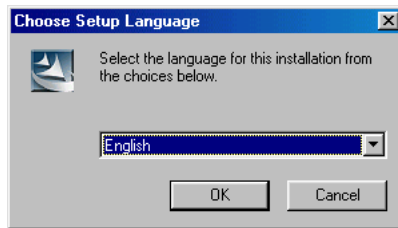


2. Please input the name of user and company, then click "Next", and follow the onscreen instructions to install your PenPower WorldPhone step by step.

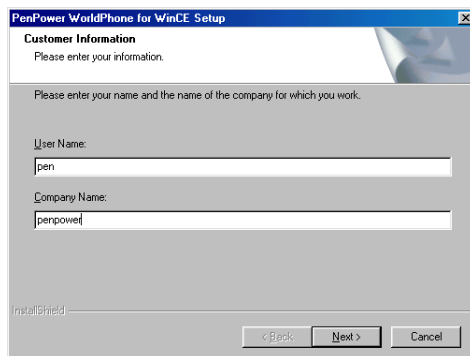

3. Before you install your PenPower WorldPhone application onto your Pocket PC, please select to install the program to the designated directory; if you click "No", you then need to choose your own directory.

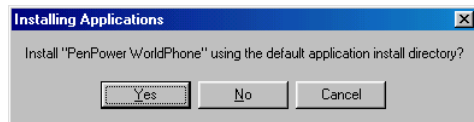

4. When the installation is completed, the PenPower WorldPhone icon will appear under the Programs bar on your Pocket PC.

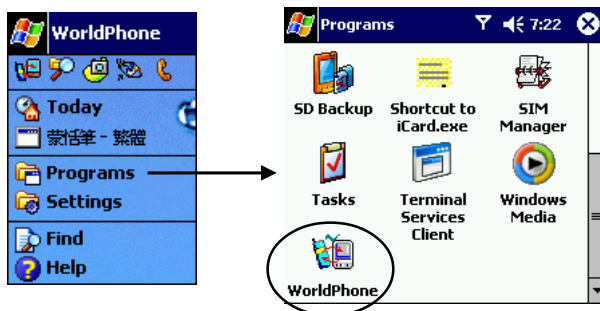


Software Registration for PenPower WorldPhone (WinCE)

You will see a registration screen at the first time you launch the PenPower WorldPhone program. Please click "Register" and follow the registration steps:



1. Please click "Register" button as shown in the figure above. The registration screen will appear like the figure shown below. Make sure your PC has been connected with your Pocket PC via infrared/BlueTooth. Then, click "Detect", and the system will auto-detect the model of your mobile phone as well as auto-complete the "Phone ID" line box.

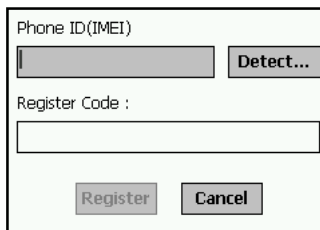

Phone ID(IMEI)

Register Code :

2. Next, please log onto the World Wide Web, and go to the registration page of PenPower WorldPhone for WinCE: <http://www.penpower.com.tw/cereg/inputbig.asp> (or go to PenPower home page: <http://www.penpower.net/page.htm>) to obtain the registration number.



蒙恬科技股份有限公司
PENPOWER TECHNOLOGY LTD.

Phone ID:

Product ID:

Email :

>X<-i\$B*ÑY+!'-o%Wq Copyright (c) 2001 penpower.net All Rights Reserved.

3. On the registration screen, please fill out the phone ID detected earlier, the product ID and your email address; then click "OK", the registration-was-successful screen will appear and give you the registration number.



Note: The product ID can be found on the product package. It is a 12-digit number, made up of numbers and alphabets in uppercase.

4. Upon receipt of the registration number, please go back to the PenPower WorldPhone registration screen on your Pocket PC, and fill out the Register Code. Next, click "Register" to complete the registration.

The diagram shows a registration screen with the following elements:

- A label "Phone ID(IMEI)" above a text input field.
- A "Detect..." button to the right of the Phone ID input field.
- A label "Register Code :" above a text input field.
- A "Register" button and a "Cancel" button at the bottom.

An arrow points from the "Register Code" input field to the right, indicating where to enter the code.

fill out the RegCode.



Tips: If you select "Register Later" on the registration screen, you can always go back to open the registration screen from "File" / "About" and click "Register" to launch the registration screen.



If you are using a mobile phone that has not yet been registered, you will have the following limitations:

1. You can run the program for 50 times. Reinstall after uninstall, you still have trial use for 50 times.
2. Every time you launch PenPower WorldPhone, a note saying "Please register this product, You have "n" times left" will appear.
3. When sending SMS, "PenPower WorldPhone" will be included as a pre-set signature text.
4. Phone book can only upload or download 15 strokes.
5. When uploading logos, the word "WorldPhone" will be inserted on the logo's bottom right corner.
6. When uploading ring message, 16 syllables maximum can be transmitted.

Chapter 3: Function Guide

PenPower WorldPhone is a management system for the transmission of mobile phone information. It consists of 5 pages that manage SMS, Phone Book, logo, ring and dial. You can download info from a mobile phone to your Pocket PC, use the PenPower WorldPhone program to add or edit the info, and upload the info back to your mobile phone via IrDA or Bluetooth.


Getting Started

Run "Start" / "Programs" / "WorldPhone"



Connecting Mobile Phone

PenPower WorldPhone provides 2 kinds of connection: **IrDA** and **Bluetooth**. On "Mobile Information" screen, you can select a suitable option to connect with your mobile phone.

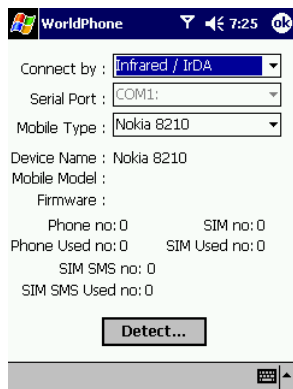

**BlueTooth**

When you select "BlueTooth", you have to choose your "Serial port" and "Mobile Type", then click "OK" to complete the connection.




Note: For BlueTooth connection details, please refer to your mobile phone user's manual or BlueTooth installation manual.

IrDA

If you select to use "Infrared/IrDA" to connect your mobile phone, please open your mobile phone's infrared device, and have it pointed directly to the infrared device on your Pocket PC.

If you directly click the "Detect" button on the "Mobile Information" page, the system will automatically detect your mobile phone model and complete the connection.

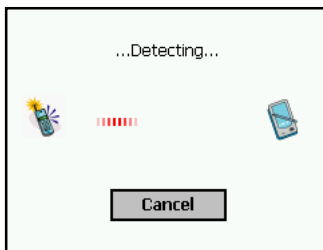



PenPower WorldPhone currently supports the following phone models: Nokia 5210, 6210, 6250, 6500, 6510, 7110, 7190, 8210, 8250, 8290, 8310, 8390, 8850, 8855, 8890, 8910; Siemens 2588, 3568i, 6618, 6688; Motorola 7689, 7389, 12000, a6288, 388; timepost; Ericsson T39, T68, T68i, R320, R380

This list of mobile phones the PenPower WorldPhone supports changes from time to time. Please log onto the PenPower website (www.penpower.net) to check for details, as well as to download updates to your PenPower WorldPhone program.

SMS Functions

The SMS page consists of 3 pages: "Inbox", "Outbox" and "Draft".

You can also click "Add Class" to add for yourself additional categories to the SMS management page.

 Tip: On PenPower WorldPhone management page, you can click  to launch quick tool bar.




"Inbox" - contains SMSs you download from your mobile phone.

"Outbox" - contains copies of your SMSs sent from your mobile phone


"Draft" - contains SMSs you compose in your WorldPhone, but not yet send out.

Add new SMS category

On the SMS management page, select "Add Class", and define your own category for viewing according to your personal needs, this will enable you to more conveniently manage your SMSs. After adding a new category, you can go to other SMS category pages, select a group of SMSs, and choose "Change class" on the Pop-up menu.

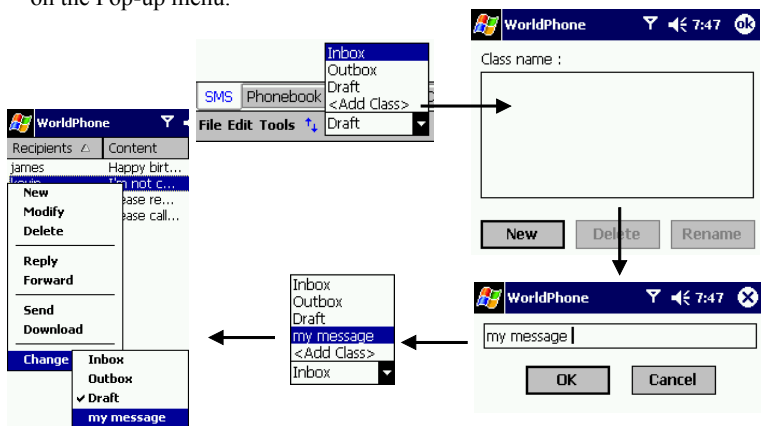

Add New SMS

Select "Tools" / "New" or click the "Add" button  to open SMS edit screen. After inputting the recipient's phone number and message content, click "Send" to send out the SMS, or you may click "Save" to save the SMS onto the "Draft" page.




When you are to input the phone numbers of a recipient, you can click "PhoneBook" and directly pick from either the Phone Book of PenPower WorldPhone, or the Contacts of Win CE.




When you are to input content message, you can click "Content", launch the Frequent SMS collection and just pick from there the line you need for your SMS.

Besides those inbuilt SMS phrases, you can also open "Tools" / "SMS Template Management" to add new category to those frequently used SMS, or to compose other SMS frequently used text.

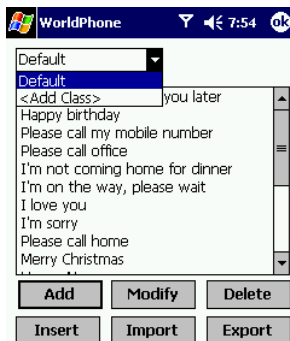


When sending SMS, you can add signature. From "Tools" / "Signature", open signature edit screen, make up your own signature and also to choose whether to attach your signature to all your outgoing SMSs.

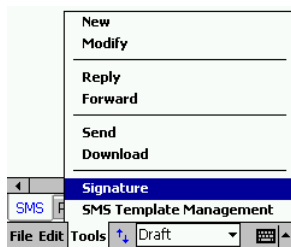

Download SMS

Once you have connected your mobile phone with your Pocket PC, you can then download SMS info from your mobile phone to the WorldPhone program.


Select "Tools" / "Download", or click the "Download" button  of your PenPower WorldPhone, SMS info on your mobile phone will then be transmitted to the PenPower WorldPhone program via infrared.



Tip: "Received message" on your mobile phone will be downloaded onto the "Inbox" page; while "Saved message" will be downloaded to the "Draft" page.




Reply SMS

On the SMS management page, you can choose certain info, select "Tools" / "Reply" or click the "Reply" button  to open up the SMS edit screen. The sender's phone number of the SMS you choose will be automatically added into the recipient line box. Input the content and click "Send", the reply SMS can then be sent out from your online mobile phone via infrared.



Tip: You may also, after editing your SMS, click "Save" and the SMS will be saved into the "Draft" box to be sent out later.


Forward SMS

On the SMS management page, you can choose certain info and select the "Tools" / "Forward" button  to open the SMS edit screen. You can add recipients' phone numbers from the Phone Book, then click "Send"; the SMS will then be forwarded to other people from your online mobile phone via infrared.



Note: If a SMS contains Chinese text, the mobile phone receiving the SMS have to have Chinese SMS support. Each SMS can hold up to 160 English characters or 70 Chinese characters (depending on the various models of mobile phone). If the SMS content is too long, it will be broken up into a series of SMSs to be sent out.

Modify SMS


On the Draft page, you can edit the SMS content. Highlight the SMS you want to edit, select "Tools" / "Modify", or click the "Modify" button . After you have edited the phone number of a recipient or the content of a SMS, click "Send" to send out the SMS to a recipient. Or, click "Save" to save the SMS onto the Draft page.




Note: Only SMSs on the "Draft" page or those on the "Add Class" page can be edited.

Phone Book Functions


In the "Phonebook" page, you can either download the phone book info or upload the phone book from Pocket PC to your mobile phone via infrared or BlueTooth.

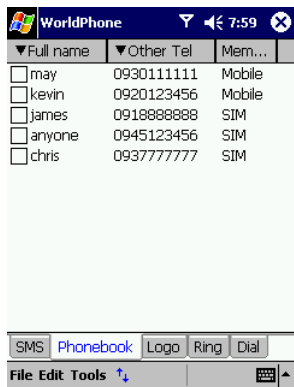

Download Phone Book


Select "Tools" / "Download", and click the download button  of the WorldPhone to send via infrared or BlueTooth, the phone book info from the mobile phone to the PenPower WorldPhone program. The phone info being downloaded from the mobile phone will indicate its origin - whether it is from "Mobile" or "SIM card".

Modify Phone Book Info

If you want to edit the Phone Book, you can directly double-click on the info to be edited, or highlight certain info, and then select "Tools" / "Modify" or click "Modify" button  to open up the edit screen.


You can choose to save the phone numbers either to your mobile phone or the SIM card, or you can set groupings for these phone numbers. Click "OK" to complete modification.




 Note: Some SIM cards, depending on their various systems, can store English only Phone Book, while others can store Chinese/English Phone Book. But for mobile phone RAM, it can store Chinese/English Phone Book.



Note: Depending on the various mobile phone models, the "Group" may have different groups. For example, Nokia mobile phone has 6 groups, namely: Family, VIPs, Friends, Colleagues, Others and Cancel.


The modified info will automatically be checked as "Upload Icon" on the list. You can click the "Tools" / "Send", or click "Send" button  to send the modified phone info to your mobile phone.

Add New Info to Phone Book

To add new phone info, please select "Tools" / "New", or to click the "Add" button  to open up a new phone edit screen. Enter the location of where you would like to save the phone info to, the name, the phone number, and the grouping, then click "OK" to complete adding new phone info.


Dial

You can pick a phone number and select "Tools" / "Dial". This way, you don't need to press the mobile phone keypad to dial out.

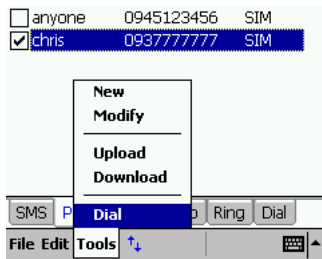


Add new dynamic fields to Phone Book


If your mobile phone support dynamic, multi-fields Contact List, when you add a new phone info, besides preset fields, you can click "Add" to add in other fields of data.

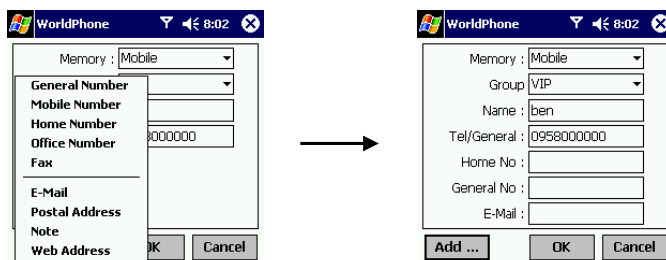


On Phone Book management page, click and hold on to the black triangle on the left side of the phone number field, a pull-down menu will appear. You can freely scroll up and down to choose to view any particular fields of info.

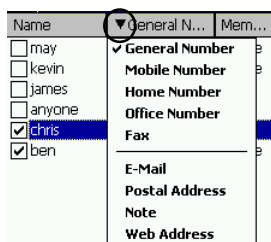

On any management page, when you keep on clicking to a column heading, a "Sort" icon will appear to enable you to view the info in ascending or descending order. If there is no "Sort" icon appearing, that means you cannot arrange the order in sequence.






 Note: Mobile phone models that currently support dynamic Phone Book fields: Nokia 8310, 6500, 6510, 8910; Erisson T39, T68, T68i.




Logo Function

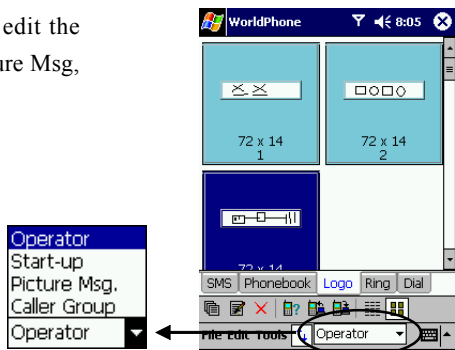On the "Logo" page, you can edit the Operator, the Start-up, the Picture Msg, and the Caller group.



On the logo management page, there are 2 options to view: by thumbnails  or by list .

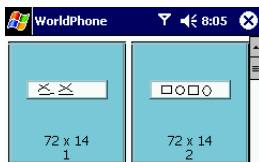



view by thumbnails


Name	Size	Date/Time
1	72x14	2002/05/...
2	72x14	2002/05/...
3	72x14	2002/05/...


view by list


Download/Upload Logos

Select "Tools" / "Download" or click on the download button  of the PenPower WorldPhone, you can transmit the logo on your mobile phone onto the PenPower WorldPhone program via infrared.


Highlight a logo, select "Tools" / "Upload", or click the upload button , you can transmit the logo to your mobile phone via infrared.


 Note: Both Nokia 6210 and 7110 mobile phone offer 3 groups of "Operator" logo saving mode. Same model SIM card uses the same saving mode to read, write or view. If you switch to a different brand of SIM cards, you can edit different images. However, you can not upload more than 3 groups of logos.


 Note: Other Nokia mobile phone models offer only 1 group of "Operator", but you can read/write repeatedly.

 Note: When using Siemens mobile phones, if the upload is being cut off or fails, it may cause the mobile phone to turn into a self-protected mode. In such an instance, logos can neither be uploaded nor downloaded. To recover, turn the mobile phone off and back on again.

Edit Logos

You can edit the logos downloaded from your mobile phone. You can also add in new logos. Click the "Add" button  to open the logo edit screen. The PenPower WorldPhone provides a number of drawing tools for you to edit logos. You can also use colour palette to create logos in colour.

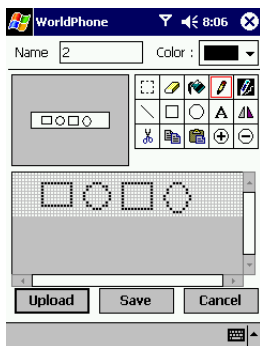



 Tip: Different logo dimensions are available, depending on the various models of mobile phones.

When the editing is done, you can click "Upload" to send the logo to your online mobile phone; or click "Save" to save the logo onto the Pocket PC.



Send Out Logo in SMS Format

Highlight a logo, select "Tools" / "Send via SMS", input phone number and click "Send". This way you can send out logo to other people in SMS format. If you select "Save to phone", such a logo will then be saved to your online mobile phone. Some mobile phones can save the logo along with the recipient's phone number, and you may later send it off directly from your mobile phone.

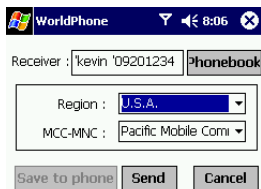


Note: For Nokia 7110 mobile phone, it cannot receive any logo SMS but it can send out logo SMS to other Nokia mobile phones.



Tip: If you want to send out logo in SMS format, you must first select receiver's MCC-MNC.

Import Image Files

You can convert a BMP graphic file on the Pocket PC into a mobile phone logo. Select "Tools" / "Import Image", choose a BMP graphic file from the Pocket PC file directory. By doing so, your selected graphic file will be converted into a mobile phone logo, and saved in the PenPower WorldPhone.




Ring Functions



On the "Ring" function page, you can edit rings and upload them onto your mobile phone. You can also import MIDI files from your Pocket PC and turn them into rings for your mobile phone.

Add New Rings

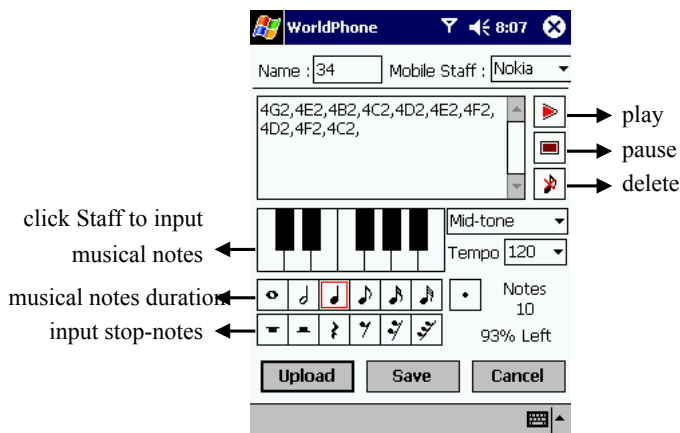To add new rings, click the "Add" button  to open the ringing edit screen.



You can use either the simple keypad on your mobile phone or directly key in the ringing pattern by using the staff and to modify the melody or beat. Then give a name for the ring and click "Save" to save the ring onto the PenPower WorldPhone, or click "Upload" to send the ring to your mobile phone.

On the ring management page, there are 2 options to view: by thumbnails  or by list .




view by thumbnails



view by list


Import Midi Files

You can convert the Pocket PC Midi files into the rings for your mobile phone. Select "Tools" / "Import MIDI", and just pick out a Midi files from your Pocket PC, it will be saved as mobile rings on your PenPower WorldPhone.



Send out rings in SMS format


Highlight a ring file, select "Tools" / "Send via SMS", input phone number and click "Send", this way you can send out rings to other people in SMS format. If you select "Save to phone", such a ring will then be saved to your online mobile phone. Some mobile phones can save the ring along with the recipient's phone number, and you may later send it off directly from your mobile phone.

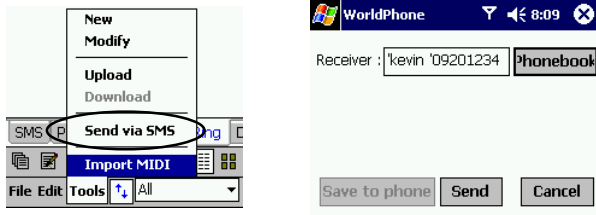

Note: Upon receipt of a ring message, only mobile phone of compatible models will be able to access the content, whereas incompatible models cannot be able to interpret the SMS.

Dial Functions

On "Dial" function page, you can directly input phone numbers from your Pocket PC instead of dialing from the keypad on your mobile phone. When you dial out, it support international direct dialing (i.e. any phone numbers that has a prefix of the "+" symbol)

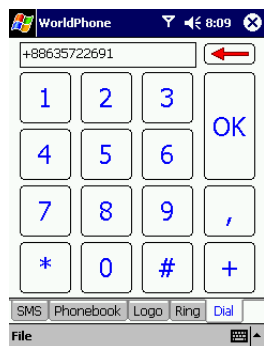

Import/Export

PenPower WorldPhone provides import and export functions. You can have your current mobile phone info exported out as PenPower WorldPhone file and subsequently import the file into the PenPower WorldPhone program on another Pocket PC.

Select "File" / "Import", you can pick to export either certain information you choose, or all information at once, or only those info on certain management page.



Language Options

Select "File" / "Language Setting", check an option to choose to view in either Traditional Chinese, Simplified Chinese, or English.





Appendix

	Phone Book	SMS	Logo	Ring	Smart Message
Nokia 6210/7110	Y	Y	Y	Y	Y
1. Images can only support 3 types of SIM cards, the 4th type will not be written onto. 2. The 3 items on phone book (i.e. e-mail, address & notes) cannot be saved all at once. You can only save up to 2 items maximum.					
Nokia 8210/8850	Y	Y	Y	Y	Y
1. SIM card is unable to use Chinese Phone Book. 2. If the Unicode of any names in the Phone Book contains a "0", interruption may occur during download.					
Nokia 8250, 5210, 8855	Y	Y	Y	Y	Y
SIEMENS 3568i (S35)	Y	Y	Y	Y	N
1. If the Phone Book is VIP, the name shown on your mobile phone will have a [!] behind it. 2. The logo portion only supports screen saver. 3. Calendar can only send English up to maximum 7 alphabets.					
SIEMENS 6688(SL45)	Y	Y	Y	Y	N
1. Calendar can only send maximum 16 alphabets.					
SIEMENS 6618(S45)/3618	Y	Y	Y	Y	N
1. Calendar can only send 16 alphabets maximum.					
Motorola P689	Y	Y	N	Y	N
1. Chinese SMS can hold up to only 62 characters. English SMS is not a problem (160-byte capacity). Will have problem to send SMS using mobile phone <<made in Taiwan>> SIM cards.					
Motorola P7389i	Y	Y	N	Y	N
1. Unable to send Chinese Phone Book.					

	Phone Book	SMS	Logo	Ring	Smart Message
Motorola L2000	Y	Y	N	N	N
1. Some are unable to send Chinese Phone Book. For those that works, however, they have the same problem like that of Nokia 8210.					
Ericsson R320	Y	Y	N	N	N
1. Unable to send Chinese phone book.					
2. Unable to know the phone book usage capacity in advance, and so it reads all every time when in use.					
Ericsson R380	N	Y	N	N	N
1. 380 will automatically copy SIM card info to mobile phone, with the original SIM card info deleted, therefore it can only send SMS but unable to read SMS.					
Ericsson T39/T68/T68i	Y	Y	Y	Y	N
1. Unable to know the phone book SIM card usage capacity in advance, but able to recognize that of the mobile phone.					
Nokia 8310, 6500, 6510, 8910	Y	Y	Y	Y	Y
1. 8910 supports BOOT LOGO. Other mobile phones do not support that, but they have animation instead during boot time.					
Motorola 388	Y	Y	N	N	N
1. Phone Book only supports SIM card.					

	Caller group				Operator				Start-up				Picture Msg				Ring			
	U	D	S	S M S	U	D	S	S M S	U	D	S	S M S	U	D	S	S M S	U	D	S	S M S
Motorola l2000	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	O
Motorola a6288	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	O
Motorola 388	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	O
Motorola timeport	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	O
Erison T39	X	X	X	X	O	X	X	X	X	X	X	X	X	X	X	X	O	X	X	X
Erison T68	X	X	X	X	O	X	X	X	X	X	X	X	X	X	X	X	O	X	X	X
Erison T68i	X	X	X	X	O	X	X	X	X	X	X	X	X	X	X	X	O	X	X	X
Erison R320	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Erison R380	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

U--upload

D--download

S--save to mobile phone

SMS--send SMS

The above information changes constantly. Please go to the PenPower website (<http://www.penpower.net>) to check out the latest update.

PenPower WorldPhone for WinCE V2.0

Edition:Released in September, 2002

Taiwan

PenPower Technology Ltd.

Tel:(886)-3-572-2691

Fax:(886)-3-571-6243

Website: <http://www.penpower.net>

Technical Support: support@penpower.net

Address:7F, No.47 Lane 2, Sec 2, Kuang-Fu Road, Hsin-Chu, Taiwan, R.O.C.

Sales:GrandPower Technology Ltd.

Taipei:9F,No.293-3,Sec.2,Fu-Hsing S.Road,Taipei, Taiwan, R.O.C.

Tel:(886)-2-2735-9922

Fax:(886)-2-2735-5500

Taichung:4F-F,No.161,Kung-Yi Road, Taichung ,Taiwan, R.O.C.

Tel:(886)-4-2305-9922

Fax:(886)-4-2305-9900

Kaohsiung:7F-3,No.2,Jian-Guo 2nd Road, Kaohsiung ,Taiwan, R.O.C.

Tel:(886)-7-237-3811

Fax:(886)-7-237-3290

Hong Kong

Sales:Longrand Electronics Ltd.

Tel:(852) 2498-6928

Fax: (852)2402-1918

Website:<http://www.longrand.com.hk>

Address:Room 4, Floor 22, Cable TV Tower, No.9 Hoi-Shing Road, Tsuen Wan,
Hong Kong

PenPower Technology Ltd., Inc. has engaged the undersigned to be permanent counsel. The Company shall receive legal protection from the undersigned should any party infringe upon the Company's copyright, credit or any other legal interest.

Kuei-Ming Li, Lawyer
International Tung-Shang Law Firm

Overseas Technical Service Hotline

Longrand Electronics Ltd.

Tel:(852) 2498-6803

Fax:(852)2402-1918

E-mail: tech@longrand.com.hk

Address: Address: Room 4, Floor 22, Cable TV Tower, No.9 Hoi-Shing Road, Tsuen Wan, Hong Kong

Beijing PenPower Shenzhou Technology Ltd.

Tel:(86) 10-62174137

Fax:(86) 10-62150234

Address: Floor 2, Building 1, Zhongruan Mansion, No.55 South Academy Road, Haidian District, Beijing, PRC

Guangzhou PenPower Franchise Store

Tel:(86) 20-85544338

Fax:(86) 20-85545722

E-mail: penpower@penpower.com.cn

Address: Floor 6, Software Court Building, No.18 Keyun Road, Industrial Garden, Tianhe District, Guangzhou, PRC

Malaysia

Compusonic Computer Centre

Tel:(60) 4-2827268, 2827269

Fax:(60)4-2825258

E-mail:wyleng@pc.jaring.my

Address:106-B, Tan Sri The Ewe Lim Road, 11600 Penang, Malaysia

Singapore

Longrand Electronics (S) Pte Ltd.

Tel:(65)63423466

Fax:(65)63420577

E-mail:tech@longrand.com.hk

Address:150, Kampong Ampat, #04-04A KA Centre, Singapore 368324

U.S.A.

Alestron, Inc.

Tel:1-650-9698535

Fax:1-650-9698545

E-mail:penpower@alestron.com

Address:2158 Old Middelfield Way, Mountain View, CA 94034 U.S.A

Canada

ACCA Computers Inc.

Tel:1-604-278-6227

Fax:1-604-278-8627

E-mail:info@pen-power.com

Address:Unit 7, 3671 Viking Way, Richmond, B.C. V6V 2J5, Canada